



ELEVAH® 65 MOVE LIGHT

| | | |
|--|--|--------------------------------|
| Max. working height | | 6,3 m |
| Max capacity | | 150 kg |
| Number of people | | 1 |
| Use | | Internal |
| A | Closed machine height | 1700 mm |
| B | Minimum platform height | 400 mm |
| C | Maximum platform height | 4345 mm |
| D | Base overall dimensions | 1280 mm |
| E | | 780 mm |
| F | Cage dimensions | 770 mm |
| G | | 790 mm |
| Machine weight | | 538 kg |
| Power supply | | 24 V |
| Batteries | | Lead-Acid Batteries 12V 105 Ah |
| Battery charger | | 110V – 220V |
| Climbing ability at height | | 2,5 % |
| H | Maximum climbing ability | 15 % |
| Drive wheels dimension | | Ø 230 x 60 mm |
| Swivel wheels dimensions | | Ø 200 x 50 mm |
| Internal turning radius | | 0 |
| External turning radius | | 1095 mm |
| Max. speed (rising – descending) | | 0,2 m/s |
| Maximum shifting speed (on the ground - at height) | | 4 km/h - 1km/h |
| I | Maximum pressure for wheel at full load* | 1,9 kN |
| Work cycles (with fresh batteries)** | | 130 |

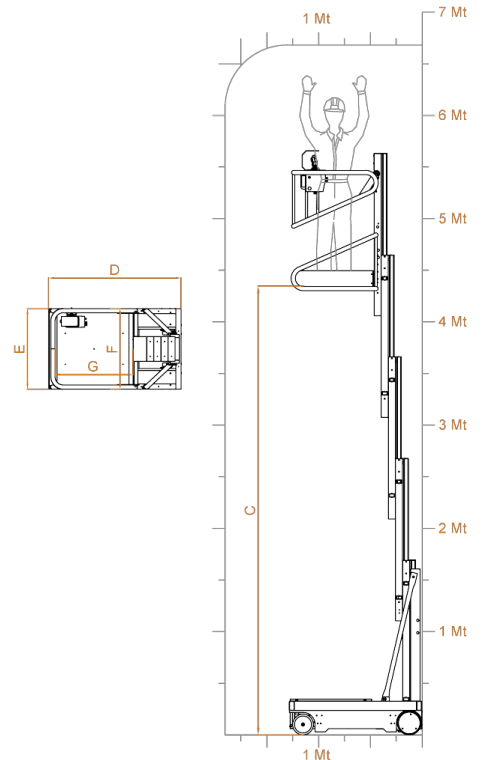

538
Kg

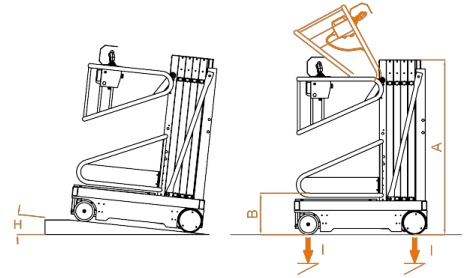

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



Compliant with **EN280** rule.
Approved for indoor use or outdoor use in the absence of wind.