

# SAFE LIFT®

 Made in Sweden

MAST LIFTS FOR INDOOR USE



## Mast lifts for indoor use

Safelift is a series of compact and flexible mast lifts for working safely indoors. Our lifts are characterised by low entry, short turning radius and low weight.

Safelift makes work at height efficient and safe, eliminating the need for ladders.

Our lifts are manufactured in Sweden and are CE marked in accordance with the high standards of safety in the EC and EN280 standards.



## Areas of use

Safelift's products are developed to facilitate work in, for example, trade, installation, cleaning, property upkeep, warehouse and construction industry.

All our products are easy to use and maintain. All lifts are delivered assembled and ready to start. At the end of the working day, the lift is connected to a standard wall outlet and the built-in charger charges the batteries.

It hardly becomes any smoother than that.



✓ SMOOTH  
✓ SAFE  
✓ SMART

EFFICIENT  
MAST LIFTS FOR  
INDOOR USE

Safelift's mast lifts are approved  
in accordance with SS-EN-280





**STABLE CONSTRUCTION**

**EASY TO USE**

**LOW DEAD WEIGHT**

# OUR PRODUCTS

## Safelift is produced in three different models

PushAround, MoveAround & StockPicker, the models are manufactured with a working height from 3.5 to 6.0 m. Safelift's mast lifts are safe and easy to use and require minimal maintenance. The lifts are delivered on EU pallets, ready for use. At the end of the working day, the lift is connected to a standard wall outlet and the built-in charger charges the batteries.

Visit [www.safelift.se/en](http://www.safelift.se/en) for further information.



### PushAround

Manually moved to where it's needed.



### MoveAround

Operated with a joystick from the basket.



### StockPicker

Drivable and has a height-adjustable lifting table.





Manually movable small and flexible lift with 3.5 meters working height. Suitable for properties with low ceilings and without the requirement for mobility in an elevated position.

#### SPECIFICATIONS

Size of the platform .....	0.55 m x 0.65 m
Total load on the platform .....	Max 130 kg
Total number of people .....	Max 1
Working height .....	3.5 m
Platform height .....	1.5 m
Lifting time (130 kg) .....	14.5 s
Weight .....	236 kg
Total length .....	1.0 m
Total width .....	0.7 m
Total height .....	1.6 m
Power source .....	2 x 12 V batteries, 9 Ah, maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Electric motor, 24 V DC
Wheels .....	ø 160 mm (front) / 125 mm (rear), polyurethane coating, leaves no marks
Parking brakes .....	Automatic (front), Manual (rear)
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m



**PushAround  
PA50**

Manually movable stylish and flexible lift with 5 meters working height. Suitable for properties with high ceilings and without the requirement for mobility in an elevated position.

**SPECIFICATIONS**

Size of the platform .....	0.53 m x 0.76 m
Total load on the platform .....	Max 150 kg
Total number of people .....	Max 1
Working height .....	5 m
Platform height .....	3 m
Lifting time (150 kg) .....	16 s
Weight .....	331 kg
Total length .....	1.20 m
Total width .....	0.76 m
Total height .....	1.66 m
Power source .....	2 x 12 V batteries, 80 Ah (C20), maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Manual
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m





**6M  
WORKING HEIGHT**

**150KG  
MAX LOAD**

**466KG  
WEIGHT**



**PushAround  
PA60**

Manually movable stylish and flexible lift with 6 meters working height. Suitable for properties with high ceilings and without the requirement for mobility in an elevated position.

#### SPECIFICATIONS

Size of the platform .....	0.53 m x 0.76 m
Total load on the platform .....	Max 150 kg
Total number of people .....	Max 1
Working height .....	6 m
Platform height .....	4 m
Lifting time (150 kg) .....	18.5 s
Weight .....	466 kg
Total length .....	1.16 m
Total width .....	0.77 m
Total height .....	1.98 m
Power source .....	2 x 12 V batteries, 80 Ah (C20), maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m



**MoveAround  
MA50**

Driveable lift with a working height of 5 meters that can be disengaged for manual movement in narrow passages. Suitable for properties with high ceilings and requirements for mobility in an elevated position.

**SPECIFICATIONS**

Size of the platform .....	0.53 m x 0.76 m
Total load on the platform .....	Max 150 kg
Total number of people .....	Max 1
Working height .....	5 m
Platform height .....	3 m
Lifting time (150 kg) .....	16 s
Weight .....	331 kg
Total length .....	1.20 m
Total width .....	0.76 m
Total height .....	1.66 m
Driving speed .....	Lowered 4 km/h, raised 2 km/h
Power source .....	2 x 12 V batteries, 80 Ah (C20), maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m

**5M  
WORKING HEIGHT**

**150KG  
MAX LOAD**

**331KG  
WEIGHT**





## MoveAround **MA60**

Driveable lift with a working height of 6 meters that can be disengaged for manual movement in narrow passages. Suitable for properties with extra high ceilings and demands for mobility in an elevated position.

### SPECIFICATIONS

Size of the platform .....	0.53 m x 0.76 m
Total load on the platform .....	Max 150 kg
Total number of people .....	Max 1
Working height .....	6 m
Platform height .....	4 m
Lifting time (150 kg) .....	18.5 s
Weight .....	466 kg
Total length .....	1.16 m
Total width .....	0.77 m
Total height .....	1.98 m
Driving speed .....	Lowered 3 km/h, raised 1 km/h
Power source .....	2 x 12 V batteries, 80 Ah (C20), maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m



MoveAround  
**MA50-R**

The MA50-R is a special variant of the MA50. The same features, but the MA50-R also has a retractable basket that allows you to get up into 60×60 false ceilings.

**SPECIFICATIONS**

Size of the platform .....	0.56 m x 0.52 m
Total load on the platform .....	Max 150 kg
Total number of people .....	Max 1
Working height .....	5 m
Platform height .....	3 m
Lifting time (150 kg) .....	16 s
Weight .....	343 kg
Total length .....	1.16 m
Total width .....	0.76 m
Total height .....	1.66 m
Driving speed .....	Lowered 4 km/h, raised 2 km/h
Power source .....	2 x 12 V batteries, 80 Ah (C20), maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m

**5M**  
WORKING HEIGHT

**150KG**  
MAX LOAD

**343KG**  
WEIGHT





## MoveAround **MA50H**

The MA50H is a robust pillar lift developed for increased safety in demanding work situations. The lift is intended to lift an operator with tools (max 180 kg) to a working height of up to 5 meters.

### SPECIFICATIONS

Size of the platform .....	0.54 m x 0.77 m
Total load on the platform .....	Max 180 kg
Total number of people .....	Max 1
Working height .....	5 m
Platform height .....	3 m
Lifting time (150 kg) .....	14 s
Weight .....	445 kg
Total length .....	1.18 m
Total width .....	0.76 m
Total height .....	1.81 m
Driving speed .....	Lowered 4 km/h, raised 0.8 km/h
Power source .....	2 x 12 V batteries, 110 Ah (C20), maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 250 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic (front), Manual (rear)
Height of railing .....	1.1 m
Height of skirting board .....	0.23 m




## StockPicker SP50


Driveable lift with height-adjustable lifting table. 5 meters working height and lifting table capacity of 50 kg. Suitable for shops and warehouses.

### SPECIFICATIONS

Size of the platform .....	0.63 m x 0.59 m
Total load on the platform .....	Max 165 kg (incl. lifting table)
Total number of people .....	Max 1
Working height .....	5 m
Platform height .....	3 m
Lifting time (165 kg) .....	16 s
Weight .....	386 kg
Total length .....	1.16 m
Total width .....	0.77 m
Total height .....	1.62 m
Driving speed .....	Lowered 4 km/h, raised 2 km/h
Power source .....	2 x 12 V batteries, 110 Ah (C20), maintenance-free
Line voltage .....	24 V
Battery charger .....	230 V, 50 Hz / 60 Hz
Lifting system .....	Single manoeuvred hydraulic cylinder
Wheels .....	ø 200 mm, polyurethane coating, leaves no marks
Parking brakes .....	Automatic
Height of railing .....	1.1 m
Height of skirting board .....	0.15 m

**5M  
WORKING HEIGHT**

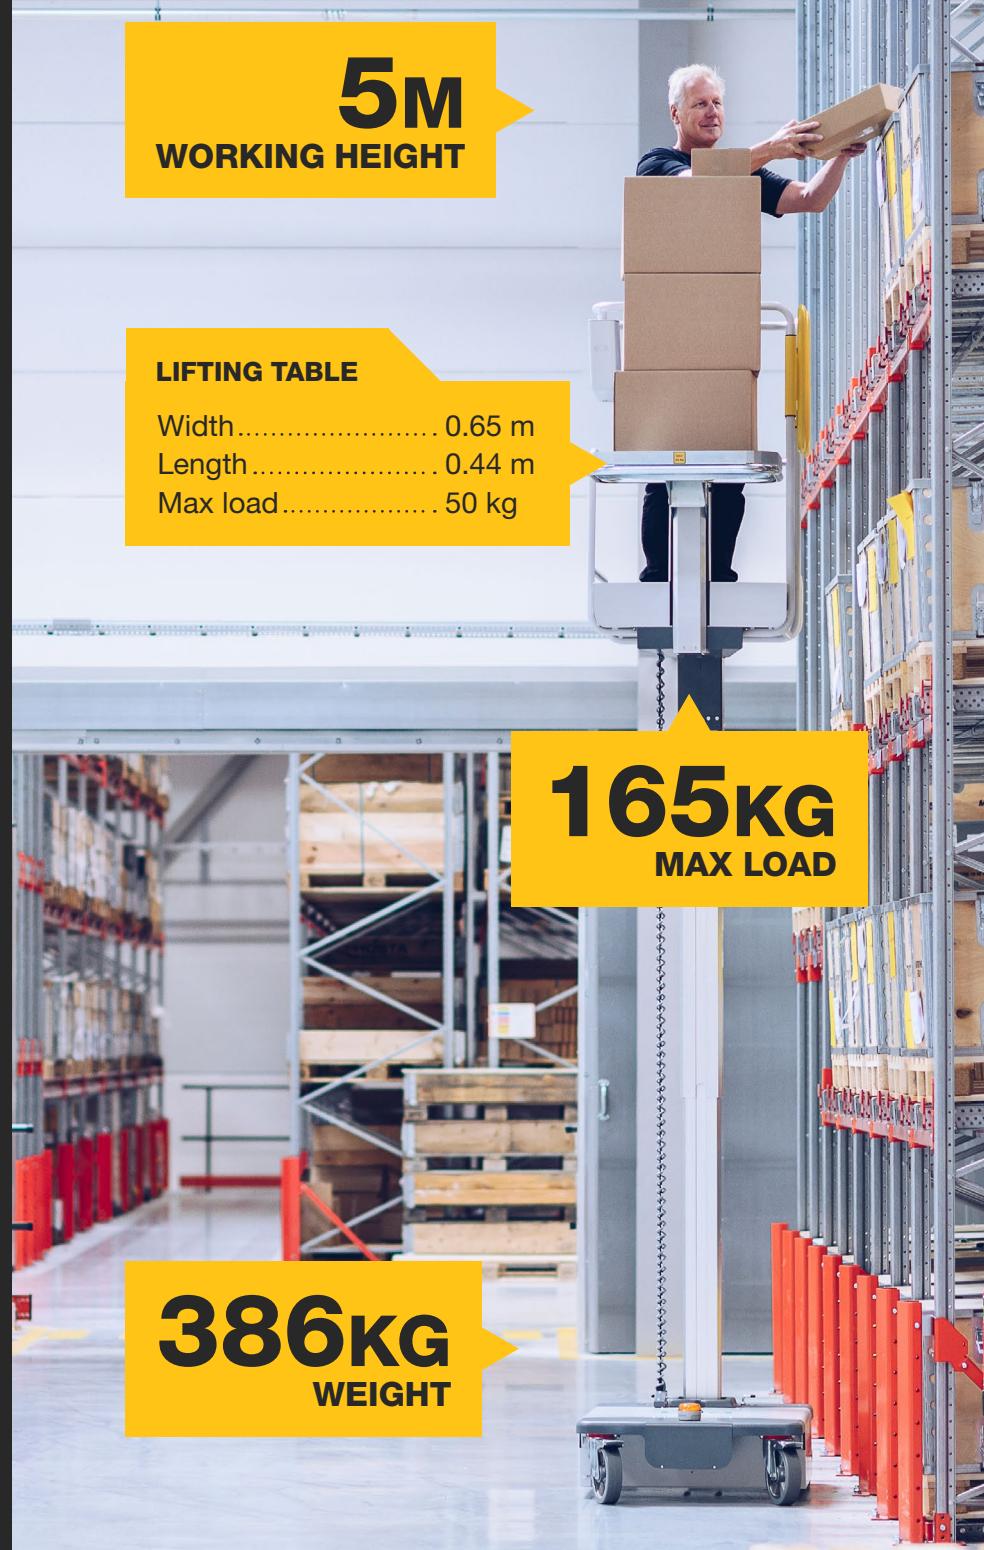

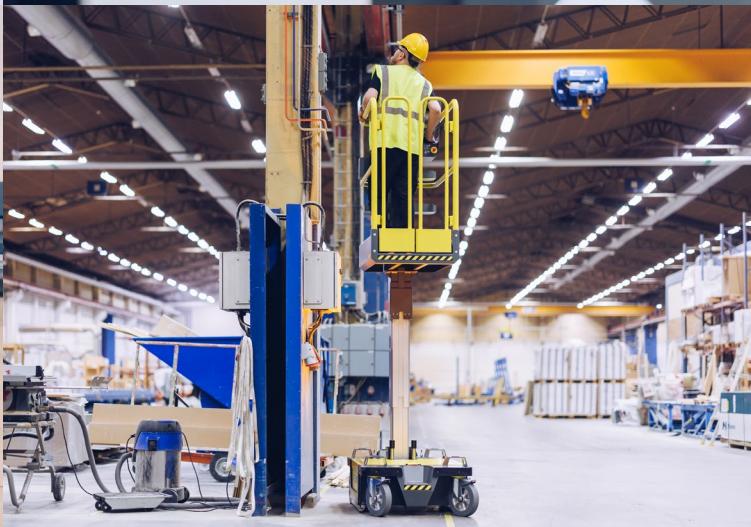

# ADVANTAGES OF SAFELIFT



## Decoupling

The drive is disconnected with a simple grip and the lift is manually moved.

(Applies to MA50, MA60, MA50-R, MA50H & SP50)



## Compact

Compact design for easy passage in tight spaces.



## Low dead weight

Low dead weight enables transport in ordinary lifts and on sensitive floors.



## User friendly

Developed with a focus on user-friendliness & ergonomics.



## USB socket

USB sockets are available for easy charging of tablet or mobile device.

(Applies to PA50, PA60, MA50, MA50-R & MA60)



## Small turning radius

With a small turning radius the lift easily takes the corner.



# SAFE LIFT®



Made in Sweden

Safelift is manufactured and marketed by:

**Address:** Safelift Sweden AB  
Kvarnvägen 14  
SE-352 41 Växjö  
Sweden

**Website:** [www.safelift.se](http://www.safelift.se)  
**E-mail:** [info@safelift.se](mailto:info@safelift.se)